


Canvas

External Awning Fabric

- Australian Made
- Timeless Colour Palette
- 2.2m width in all colours



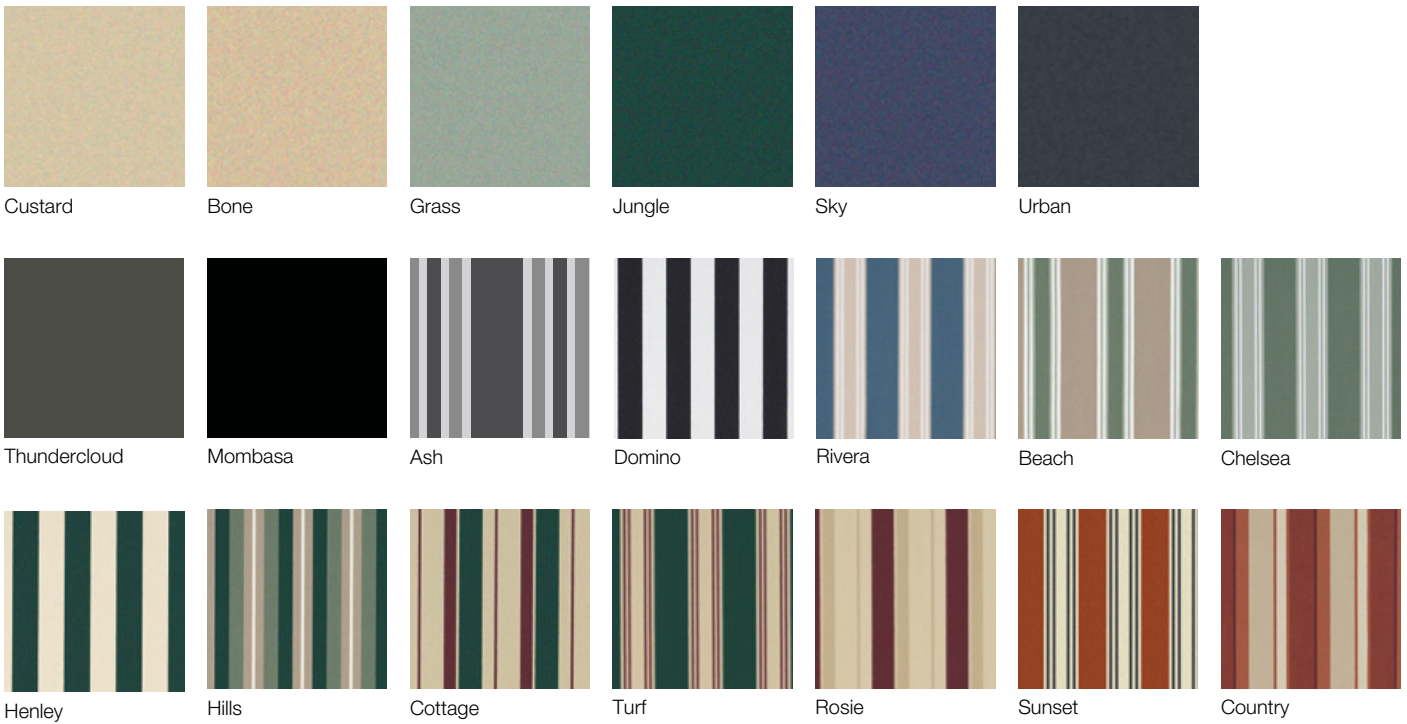

Note: Fabric scan colours are as accurate as the printing process allows.

Technical Specifications

Composition:	Plain woven, 52% Polyester and 48% Cotton fabric
Weight:	526 gsm ± 10%
Cutting Technique:	Ultrasonic, Knife Cut, Crush or Pressure Cut
Tensile Strength:	Warp > 1900, Weft > 1400
Tearing Strength:	Warp > 50N, Weft > 30N
Width:	2200mm
Thickness:	0.67 mm ± 10%
Fungal Resistance:	No growth and criteria 7.2 of the ASTM C1338-14: Passed
Colourfastness:	6-7 Blue Scale (AS2001.4.21)
Applications:	External Awnings

Fire Retardancy Information

Fire Retardancy Information for NON FR Products*
 Suitable for all building classes **except** Class 9(b) entertainment venues.
 A summary of BCA requirements can be provided on request.

Spread of Flame Index* (Range 0-10)	9
Heat Evolved Index* (Range 0-10)	6
Smoke Developed Index* (Range 0-10)	6
Ignitability Index* (Range 0-20)	15
Flammability Index	88

*Fabrics which are not FR treated, have been FR tested and have a Flammability result over 6 or fabrics which are not FR treated and have not undergone FR testing.

Note: Colours and patterns shown are just for a general overview of the range and are as accurate as the printing process allows. Please refer to the fabric swatch for selections.

Solar protection indicators are laboratory-tested. The most relevant and widely used thermal comfort factors are as follows:

Thermal Comfort			Visual Comfort	
Colour	Ts	Rs	As	TL
C210 Domino	0	39	62	0

The fenestration property tests were conducted in accordance with EN 410 (1998), EN 14501:(2005), and EN 14500:(2008).

THERMAL COMFORT Fabric Only

Ts Solar Transmittance (%)
Rs Solar Reflectance (%)
As Solar Absorbance (%)

Solar radiation is always partially transmitted through, absorbed or reflected by the fabric. The sum of all 3 equals 100. $T_s + R_s + A_s = 100\%$ of solar energy.

VISUAL COMFORT Fabric Only

TL Light Transmittance (%)

Product Range

Item	Range	Width	Roll Length
82.296.XXX	Awning Canvas	2200mm	35m



Fade Resistance

Designed & tested for Australian conditions & colour fastness standards.

Australian Made

Proudly made in Australia, supporting local textiles & ensuring a high quality standard every time.

Mildew Resistant

Treated with antimicrobial protection reducing the development of bacteria & mildew.

Timeless Palette

Timeless colour palette inspired by current Australian home exterior trends.